


## Next-Generation Firewall

# 1200 Series

For regional offices, 65 Gbps firewall throughput

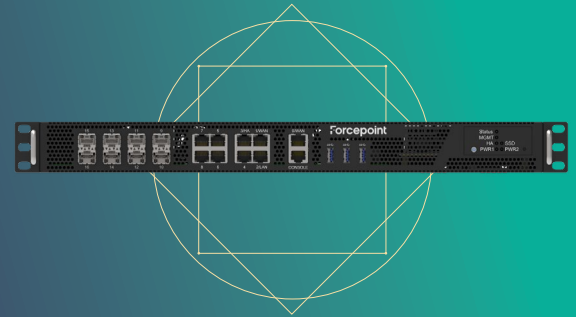

## Key Benefits

- › 1U design
- › 1 Gbps, 2.5 Gbps and 10 Gbps interface speeds
- › High-availability clustering
- › Multi-ISP SD-WAN and site-to-site Multi-Link™ VPN connectivity and optimization
- › High-security NGFW with anti-evasion technology and endpoint-aware policy enforcement
- › Application Health Monitoring dashboards to spot network issues before they become network-wide problems
- › Security policy and operating software updates with just a few clicks
- › Centralized management of up to 6,000 appliances at once
- › Integration with Forcepoint ONE SSE solutions (SWG, CASB, ZTNA)
- › Built-in ZTNA App Connector simplifies deployment of ZTNA, eliminating the need for VPNs to access private apps
- › Optional Advanced Malware Detection & Protection (AMDP)
- › Optional URL Filtering powered by Forcepoint ThreatSeeker

Branch offices, mid-sized organizations, and small data centers can easily and affordably connect directly to the cloud with the Forcepoint NGFW 1200 series. This entry-level 1U appliance offers multiple 1 gigabit and 10 gigabit Ethernet connectivity with built-in Secure SD-WAN and Next-Generation Firewall (NGFW) security capabilities, including Intrusion Prevention Systems (IPS) – all centrally managed via Forcepoint Secure SD-WAN Manager Console (SMC).

### Direct-to-cloud SASE connectivity and security for the hybrid enterprise

Digital transformation is all about connecting distributed workforces to the resources they need, no matter where they are. With applications and data migrating to the cloud, organizations are increasingly finding that old “hub-and-spoke” networking technologies, like MPLS, are ineffective for today’s modern cloud environments.

The Forcepoint NGFW 1200 Series combines networking and security to safely connect branches and mid-size offices directly to the internet for maximum productivity. The Forcepoint NGFW 1200 provides 1, 2.5 and 10 Gbps interfaces, along with SFP+ slots, enabling organizations to customize the appliance to meet their unique connectivity requirements.

### Reduced costs and footprint with integrated SD-WAN and NGFW

The Forcepoint NGFW 1200 Series combines a wide range of capabilities in an entry-level 1U rack-mountable appliance that provides flexible connectivity and power options. It integrates multi-ISP SD-WAN connectivity, site-to-site Multi-Link™ VPN and high-availability load balancing clustering with the industry’s strongest Next-Generation Firewall (NGFW) and Intrusion Prevention Security (IPS). It also has a built-in ZTNA App Connector for providing access to internal private apps via Forcepoint ONE’s Zero Trust Network Access (ZTNA) cloud service, eliminating the need for users to wrestle with VPNs.

Like all Forcepoint NGFW appliances, the Forcepoint NGFW 1200 Series is centrally administered using the Forcepoint Secure SD-WAN Manager Console (SMC). Forcepoint NGFW devices throughout the world can be deployed quickly, without an on-site technician, and SMC enables access and security policies to be updated with just a few clicks.

### Advanced clustering for high availability

Every minute an organization is offline, it loses revenue and productivity. That’s why downtime is not an option. Forcepoint NGFW 1200 Series offers advanced clustering that allows multiple appliances (including other models of Forcepoint NGFW) to be used together to keep remote sites running, even during software updates or hardware failure. Built-in SD-WAN traffic management enables links from more than one ISP to be used at the same time to further reduce the risk of outages. Redundancy in the management console and log services enables global deployments and helps to ensure your business stays connected securely, even during unexpected interruptions.

PERFORMANCE	1202
NGFW/NGIPS throughput (HTTP 64kB payload)	5 Gbps
Max firewall throughput (UDP 1518 byte payload)	65 Gbps
Max inspection throughput (UDP 1518 byte payload)	5.9 Gbps
Threat prevention throughput	2.7 Gbs
TLS 1.2 inspection (44kB payload)	1.2 Gbps
IPsec VPN AES-GCM-256	22 Gbps
Mobile VPN clients	Unlimited
Max concurrent IPsec VPN SAs	60,000
Max concurrent inspected HTTP connections	170,000
Max concurrent connections	17 Million
New TCP connections/sec	280,000
VLAN tagging	Unlimited
Virtual contexts default/max	5/25
Max concurrent ZTNA users	250

INTERFACES	1202
Fixed Ethernet interfaces	1 x 2.5 Gbps Ethernet RJ45 8 x 1 Gbps Ethernet RJ45 8 x 10/1 Gbps Ethernet SFP+
Connectors	3 x USB 1 x serial console RJ45

PHYSICAL	1202
Regulatory model number	APP-1202C1
Form factor	1U
Dimensions W x H x D	438 x 44 x 300 mm / 17.2" x 1.7" x 11.8"
Net weight	4.8 kg / 10.6 lbs.
Weight of appliance, 1 power supply + package	7.0 kg / 15.4 lbs.
AC power supply	90–264 VAC, 50–60 Hz, 150 W
DC power supply (optional)	36–72 VDC, 150 W
Redundant power supply	Option
Typical power consumption	60 W
Max power consumption	100 W
Max BTU/hour	340
MTBF (hours)	150,000
Operating temperature	0 – +40°C / +32 – +104°F
Storage temperature	-20 – +80°C / -4 – +176°F
Relative humidity non-condensing	10% - 90%
Safety certification	CB, UL, LVD
EMI certification	CE/FCC (Class A)

ORDERING	1202
NGFW appliance	N1202
URL filtering	FPURL4X
Advanced Malware Detection & Protection*	AMDPFWS, AMDPFWM, AMDPFWL, AMDPFWXL, AMDPFWXXL
Additional Virtual Contexts (25)	FPVC25
Additional AC power supply	ACP1200
Optional DC power supply	ACPD1200
Appliance Spare Unit	N1202SPU
SFP+ Copper Transceiver 10 Gbps RJ45	SFP10T
SFP+ Fiber Transceiver 10 Gigabit Ethernet Short Reach	SFP10SR
SFP+ Fiber Transceiver 10 Gigabit Ethernet Long Reach	SFP10LR
SFP Fiber Transceiver Gigabit Ethernet SX Short Reach	SFPGESX
SFP Fiber Transceiver Gigabit Ethernet LX Long Reach	SFPGELX

\* Contact your sales representative for suitable AMDP sandbox sizing